

## INSTALLATION INSTRUCTIONS

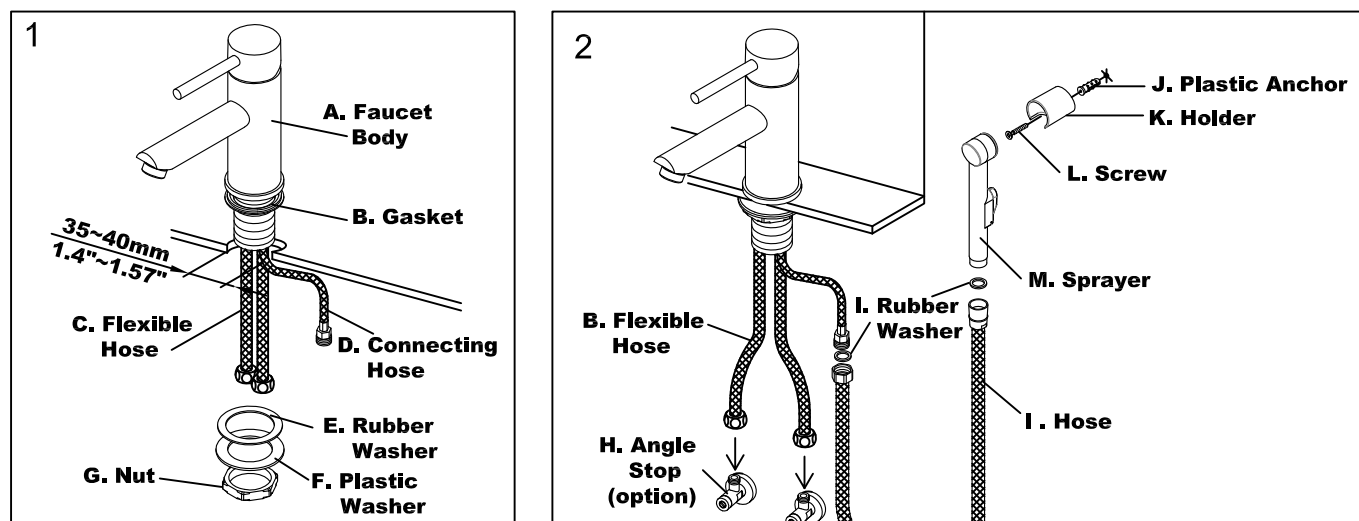









Fig. 1

1. The diameter of the installing hole should be 35~40mm.
2. Insert the **Gasket** under **Faucet Body**, and then position the **Faucet Body** on the deck.
3. Insert the **Rubber Washer**, **Plastic Washer**, and **Nut** onto **Faucet Body** in sequence, and then tighten the **Nut** securely.

Fig. 2

1. Connect the **Flexible Hoses** to water inlets.
2. Using a 6mm drill-bit drills a hole at proper position to the depth of 4cm for installation of **Holder**.
3. Insert the **Plastic Anchor** till flush with the wall, and then fix the **Holder** with **Screw** on wall.
4. Connect the **Sprayer** and **Connecting Hose** with **Hose** and **Rubber Washer**, and then position **Sprayer** to **Holder** to finish the installation.

### FIXING CONTENTS

<b>A. Faucet Body</b>	<b>C. Flexible Hose</b>	<b>E. Rubber Washer</b>	<b>G. Nut</b>	<b>I. Hose x1 &amp; Rubber Washer x2</b>	<b>K. Holder</b>	<b>M. Sprayer</b>
						
<b>B. Gasket</b>	<b>D. Connecting Hose</b>	<b>F. Plastic Washer</b>		<b>J. Plastic Anchor</b>	<b>L. Screw</b>	
